MAXANT

HONEY PROCESSING EQUIPMENT

58 Barnum Road, Devens MA 01434

TEL: 978-772-0576 FAX: 978-772-6365

1200-20 Junior Wax Spinner

The 1200-20 Junior Wax Spinner is great for hobbyist beekeepers with fewer than 100 hives.

Before using the Junior Spinner wash the inside out with hot water and dish soap to wash out any debris. After using the spinner just hot water and a wash cloth is all that is necessary to clean out the honey.

Finally, while loading cappings in the spinner the machine should be running to help even the cappings for a more stable load. Bolting the Junior Spinner down on a wider base will help with keeping the machine stable.

For best results let the spinner run for several hours. How long you need to let the spinner run varies on amount of cappings and temperature of the environment that you are uncapping in.

Maintenance:
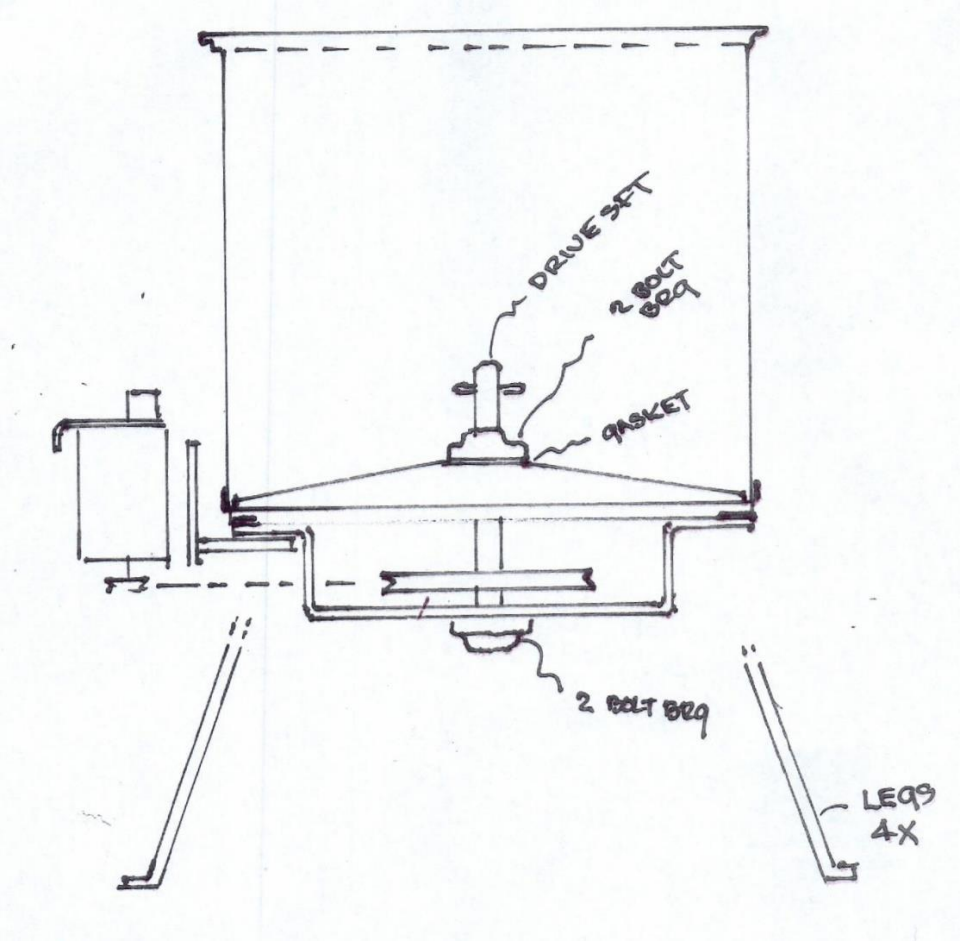
- Maintenance Schedule: Typical/Moderate Usage should be 1-2 times per year.
- Pull Basket from inside machine, no tools needed. The basket lifts up and out. There is a bearing on the inside under the basket that should be greased with food grade grease using a automotive grease gun with a flexible hose and the Zerk fitting on the side of the bearing.
- There is also another one of these bearings on the underside of the spinner on the outside that should be greased in the same fashion.
- Finally apply a film of food grease on the drive shaft before putting the basket back in.